


Metric Timing Pilot Bore

T2.5 Pitch = 2.5mm Belt Width = 6mm

Code	Teeth	Type	Dp	De	Df	Dm	B	L	Material
12 - T2.5 - 6	12	1F	9.55	9.03	13.0	13	9	16	AL
14 - T2.5 - 6	14	1F	11.14	10.62	15.0	15	9	16	AL
15 - T2.5 - 6	15	1F	11.94	11.40	15.0	15	9	16	AL
16 - T2.5 - 6	16	1F	12.73	11.21	16.0	16	9	16	AL
18 - T2.5 - 6	18	AF	14.32	13.80	17.5	10	10	16	AL
19 - T2.5 - 6	19	AF	15.12	14.60	20.0	10	10	16	AL
20 - T2.5 - 6	20	AF	15.92	15.40	20.0	11	10	16	AL
22 - T2.5 - 6	22	AF	17.51	16.99	22.0	11	10	16	AL
24 - T2.5 - 6	24	AF	19.10	18.58	22.0	12	10	16	AL
25 - T2.5 - 6	25	AF	19.89	19.37	23.0	13	10	16	AL
26 - T2.5 - 6	26	AF	20.69	20.17	26.0	14	10	16	AL
28 - T2.5 - 6	28	AF	22.28	21.76	26.0	14	10	16	AL
30 - T2.5 - 6	30	AF	23.87	23.35	28.0	16	10	16	AL
32 - T2.5 - 6	32	AF	25.46	24.95	32.0	16	11	16	AL
36 - T2.5 - 6	36	AF	28.65	28.13	36.0	20	10	16	AL
40 - T2.5 - 6	40	AF	31.83	31.31	38.0	22	10	16	AL
44 - T2.5 - 6	44	A	35.01	34.50	-	24	10	16	AL
48 - T2.5 - 6	48	A	38.20	37.68	-	26	10	16	AL
60 - T2.5 - 6	60	A	47.75	47.23	-	34	10	16	AL

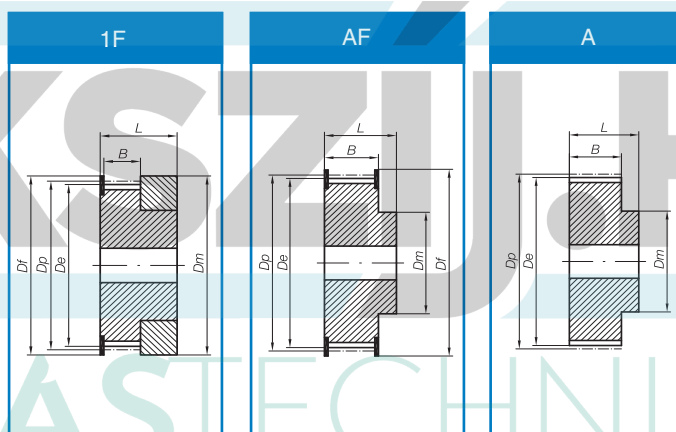

Material
 AL = Aluminium
 CI* = Cast iron
 S = Steel

POWERED BY  SIS

Df and Dm can vary without notice. During manufacturing, the lightening relief may vary slightly.

*Cast Iron items may be manufactured from steel depending upon current production availability. This may cause slight variations to non-critical dimensions. Please inform us at order placement if you are unable to accept this variation.

Every effort has been taken to ensure that the data listed in this catalogue is correct. Challenge accepts no liability for any inaccuracies or damage caused. All dimensions in millimetres unless otherwise stated.