


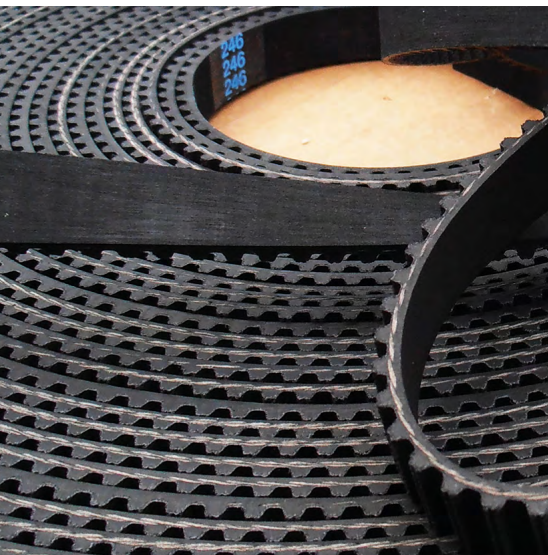


RUBBER OPEN-ENDED


TIMING BELT ROLLS

Rubber open-ended synchronous belts are specially suitable for linear drives, accurate positioning and reversal drives. A high load capacity, no maintenance cost and very low noise level, make this belt a perfect alternative to chain or cable reverse drives.


Megadyne open-ended rubber belts, produced both in straight and spiral cut, are available in the following profiles, pitches and constructions:

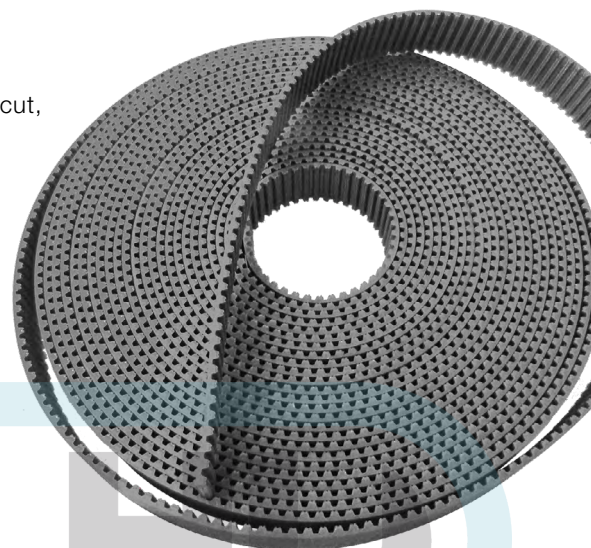

STANDARD RANGE:

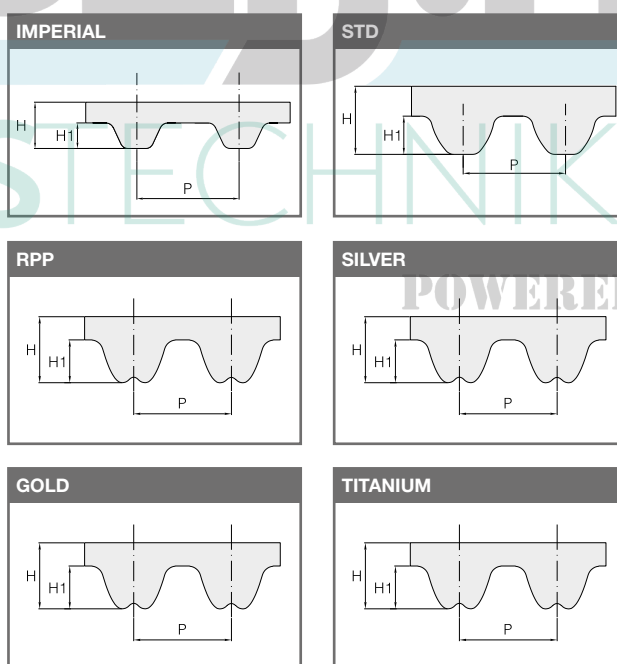

(SLV3 14M • GLD2 8M • GLD2 14M ON DEMAND)

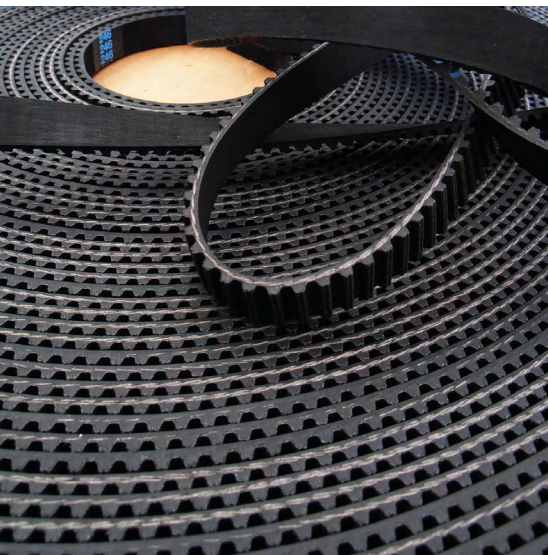

RUBBER OPEN-ENDED

TIMING BELT ROLLS

MXL		
STD. WIDTH (inches)		
	0,25	
	0,31	
	0,37	
P	2,032	
H	1,14	
H ₁	0,51	

XL		
STD. WIDTH (inches)		
	0,25	
	0,31	
	0,37	
P	5,08	
H	2,4	
H ₁	1,27	

L		
STD. WIDTH (inches)		
	0,50	
	0,75	
	1,00	
P	9,525	
H	3,8	
H ₁	1,91	

H		
STD. WIDTH (inches)		
	0,50	
	0,75	
	1,00	
	1,50	
	2,00	
	3,00	
P	12,7	
H	4,4	
H ₁	2,29	

STD8		
STD. WIDTH (mm)		
	10	
	12	
	15	
	20	
	25	
P	8	
H	5,4	
H ₁	3,05	

RPP3		
STD. WIDTH (mm)		
	9	
	12	
	15	
P	3	
H	2,4	
H ₁	1,15	

RPP5		
STD. WIDTH (mm)		
	9	
	12	
	15	
	20	
	25	
	30	
P	5	
H	3,8	
H ₁	2	

RPP8		
STD. WIDTH (mm)		
	10	
	15	
	20	
	25	
	30	
	50	
	85	
P	8	
H	5,4	
H ₁	3,2	

RPP STEEL 8		
STD. WIDTH (mm)		
	10	
	15	
	20	
	30	
	50	
P	8	
H	5,45	
H ₁	3,2	

RPP STEEL 14		
STD. WIDTH (mm)		
	25	
	40	
	55	
	85	
P	14	
H	9,65	
H ₁	6,3	

SLV3 3M		
STD. WIDTH (mm)		
	10	
	15	
	20	
	25	
P	3	
H	2,4	
H ₁	1,15	

SLV3 5M		
STD. WIDTH (mm)		
	15	
	25	
P	5	
H	3,8	
H ₁	2	

SLV3 8M		
STD. WIDTH (mm)		
	10	
	15	
	20	
	25	
P	8	
H	5,4	
H ₁	3,2	

TTM8		
STD. WIDTH (mm)		
	10	
	12	
	15	
	20	
	25	
	30	
	50	
P	8	
H	5,3	
H ₁	3,2	

TTM14		
STD. WIDTH (mm)		
	15	
	20	
	25	
	37	
P	14	
H	6,1	
H ₁	9,4	

TIMING BELTS

