


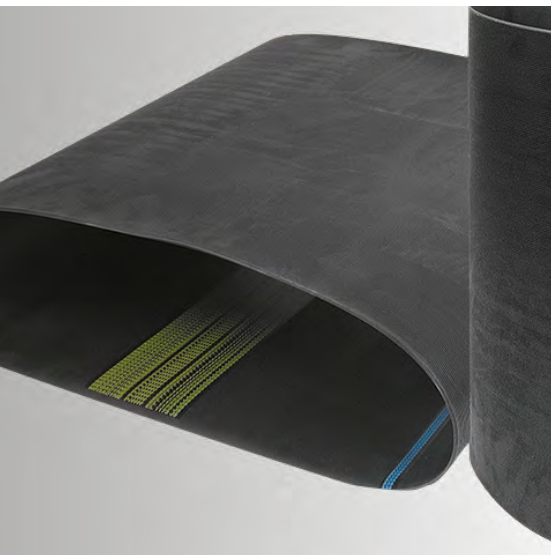

STANDARD RUBBER RIBBED

PV BELTS


PV standard rubber ribbed belts are made of polybutadiene compound and produced in PH, PJ, PK, PL and PM profiles.

PV BELTS DESIGN:

- Eliminates belt matching
- Permits drive design to meet exact power or space requirements
- Distributes the drive load across the entire belt width
- Permits cooler running and high drive efficiency
- Excels on small pulleys at high speeds

PV ribbed belts are also available in elastic version (TEM) and they are suitable in the transmission where fixed centre distance is required. The TEM belt is developed according to the customer requirements.

STANDARD RANGE:

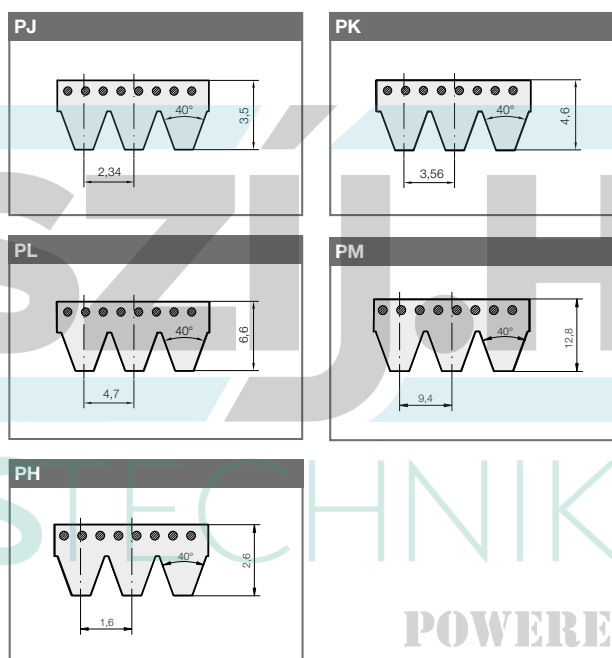

MULTI-RIB BELTS



STANDARD RUBBER RIBBED BELTS

PJ		1287	50,7	1490	58,7	2362	93,0	PH	
EFFECTIVE LENGTH		1295	51,0	1520	59,8	2477	97,5	EFFECTIVE LENGTH	
(mm)	(inches)	1301	51,0	1555	61,2	2515	99,0	(mm)	(inches)
350	13,8	1302	51,3	1610	63,4	2705	106,5	584	23,0
381	15,0	1315	51,8	1655	65,2	2743	108,0	1025	40,4
406	16,0	1318	51,9	1700	66,9	2845	112,0	1030	40,6
432	17,0	1321	52,0	1725	67,9	2896	114,0	1068	42,0
457	18,0	1326	52,2	1755	69,1	2921	115,0	1140	44,9
483	19,0	1365	53,7	1800	70,9	2997	118,0	1164	45,8
495	19,5	1371	54,0	1860	73,2	3086	121,5	1184	46,6
508	20,0	1397	55,0	1885	74,2	3124	123,0	1200	47,2
533	21,0	1428	56,2	1900	74,8	3289	129,5	1210	47,6
559	22,0	1473	58,0	1980	78,0	3327	131,0	1265	49,8
584	23,0	1524	60,0	2050	80,7	3493	137,0	1809	71,2
610	24,0	1549	61,0	2080	81,9	3696	145,5	1831	72,1
635	25,0	1600	63,0	2145	84,5	4051	159,5	1856	73,1
650	25,6	1651	65,0	2235	88,0	4191	165,0	1872	73,7
660	26,0	1752	69,0	2330	91,7	4470	176,0	1891	74,4
685	27,0	1854	73,0	2490	98,03	4623	182,0	1900	74,8
711	28,0	1895	74,6	2555	100,59	5029	198,0	1915	75,4
723	28,5	1910	75,2					1922	75,7
737	29,0	1930	76,0					1930	76,0
762	30,0	1956	77,0					1945	76,6
769	30,3	2083	82,0					1975	77,8
790	31,1	2135	84,1	PL		PM			
813	32,0	2210	87,0	EFFECTIVE LENGTH		EFFECTIVE LENGTH			
864	34,0	2337	92,0	(mm)	(inches)	(mm)	(inches)		
895	35,2	2489	98,0	953	37,5	2286	90,0		
914	36,0			991	39,0	2388	94,0		
944	37,2	PK		1041	41,0	2515	99,0		
955	37,6	EFFECTIVE LENGTH		1074	42,3	2693	106,0		
965	38,0	(mm)	(inches)	1080	42,5	2832	111,5		
990	39,0	588	23,1	1100	43,3	2921	115,0		
1016	40,0	630	24,8	1150	45,3	3010	118,5		
1036	40,8	650	25,6	1168	46,0	3124	123,0		
1040	40,9	675	26,6	1194	47,0	3327	131,0		
1051	41,4	700	27,6	1219	48,0	3531	139,0		
1065	41,9	730	28,7	1270	50,0	3734	147,0		
1080	42,5	755	29,7	1295	51,0	4089	161,0		
1089	42,9	775	30,5	1321	52,0	4191	165,0		
1092	43,0	800	31,5	1334	52,5	4470	176,0		
1100	43,3	830	32,7	1372	54,0	4648	183,0		
1108	43,6	845	33,3	1397	55,0	5029	198,0		
1116	43,9	870	34,3	1422	56,0	5410	213,0		
1136	44,7	875	34,4	1435	56,5	6121	241,0		
1143	45,0	885	34,8	1473	58,0	6883	271,0		
1150	45,3	920	36,2	1498	59,0	7646	301,0		
1160	45,7	925	36,4	1511	59,5	8408	331,0		
1168	46,0	950	37,4	1562	61,5	9169	361,0		
1170	46,1	970	38,2	1613	63,5	9931	391,0		
1184	46,6	1000	39,4	1651	65,0	10693	421,0		
1190	46,9	1015	40,0	1664	65,5	12217	481,0		
1194	47,0	1035	40,8	1715	67,5	13741	541,0		
1200	47,2	1060	41,7	1765	69,5	15266	601,0		
1203	47,4	1080	42,5	1803	71,0	16764	660,0		
1210	47,6	1145	45,1	1842	72,5				
1214	47,8	1165	45,9	1943	76,5				
1222	48,1	1200	47,2	1956	77,0				
1232	48,5	1230	48,4	1981	78,0				
1236	48,7	1300	51,2	2019	79,5				
1244	49,0	1335	52,6	2070	81,5				
1262	49,7	1385	54,5	2096	82,5				
1270	50,0	1420	55,9	2134	84,0				
1280	50,4	1460	57,5	2197	86,5				
				2235	88,0				
				2324	91,5				

MULTI-RIB BELTS