



14mm Pitch High Torque (HTD) Pulley (40mm wide Belts):

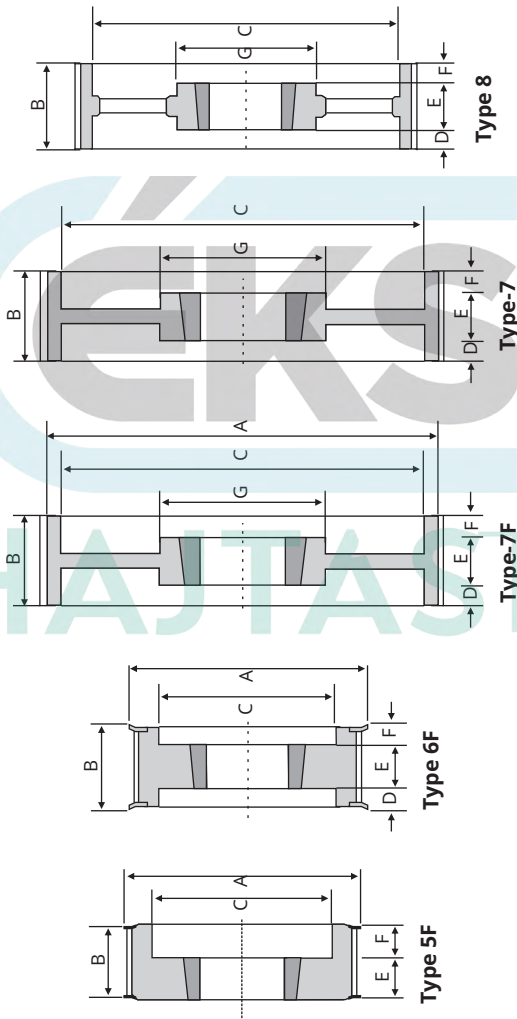


Pulley Description	Pitch Dia (P) (mm)	No. of Teeth	Outside Dia. (mm)	Bush No.	Max. Bore Met. (mm)	Imp. (inches)	Pulley Type	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)
STP-28-14M-40	124.78	28	122.12	2012	50.0	2	5F	141.0	54.0	88.0	-	32.0	22.0	-
STP-29-14M-40	129.23	29	126.57	2012	50.0	2	5F	141.0	54.0	90.0	-	32.0	22.0	-
STP-30-14M-40	133.69	30	130.99	2012	50.0	2	5F	141.0	54.0	91.0	-	32.0	22.0	-
STP-32-14M-40	142.60	32	139.88	2012	50.0	2	6F	156.0	54.0	100.0	11.0	32.0	11.0	-
STP-34-14M-40	151.51	34	148.79	2517	50.0	2 1/2	6F	156.0	54.0	109.0	4.5	45.0	4.5	-
STP-36-14M-40	160.43	36	157.68	2517	60.0	2 1/2	5F	169.0	54.0	117.0	-	45.0	9.0	-
STP-38-14M-40	169.34	38	166.60	2517	60.0	2 1/2	5F	183.0	54.0	126.0	-	45.0	9.0	-
STP-40-14M-40	178.25	40	175.49	2517	60.0	2 1/2	5F	197.0	54.0	135.0	-	45.0	9.0	-
STP-44-14M-40	196.08	44	193.28	3020	75.0	3	5F	211.0	54.0	153.0	-	51.0	3.0	-
STP-48-14M-40	213.90	48	211.11	3020	75.0	3	5F	226.0	54.0	171.0	-	51.0	3.0	-
STP-56-14M-40	249.55	56	246.76	3020	75.0	3	7F	267.0	54.0	207.0	1.5	51.0	1.5	144.0
STP-64-14M-40	285.21	64	282.41	3020	75.0	3	8F	297.0	54.0	242.0	1.5	51.0	1.5	159.0
STP-72-14M-40	320.86	72	316.06	3020	75.0	3	8	-	54.0	278.0	1.5	51.0	1.5	159.0
STP-80-14M-40	356.51	80	353.71	3020	75.0	3	7	-	54.0	314.0	1.5	51.0	1.5	159.0
STP-90-14M-40	401.07	90	398.28	3020	75.0	3	8	-	54.0	362.0	1.5	51.0	1.5	159.0
STP-112-14M-40	499.11	112	496.32	3020	75.0	3	8	-	54.0	450.0	1.5	51.0	1.5	159.0
STP-144-14M-40	641.71	144	638.92	3020	75.0	3	8	-	54.0	600.0	1.5	51.0	1.5	159.0
STP-168-14M-40	748.66	168	745.87	3020	75.0	3	8	-	54.0	706.0	1.5	51.0	1.5	159.0
STP-192-14M-40	855.62	192	852.82	3020	75.0	3	8	-	54.0	812.0	1.5	51.0	1.5	159.0

14mm Pitch High Torque (HTD) Pulley (55mm wide Belts)

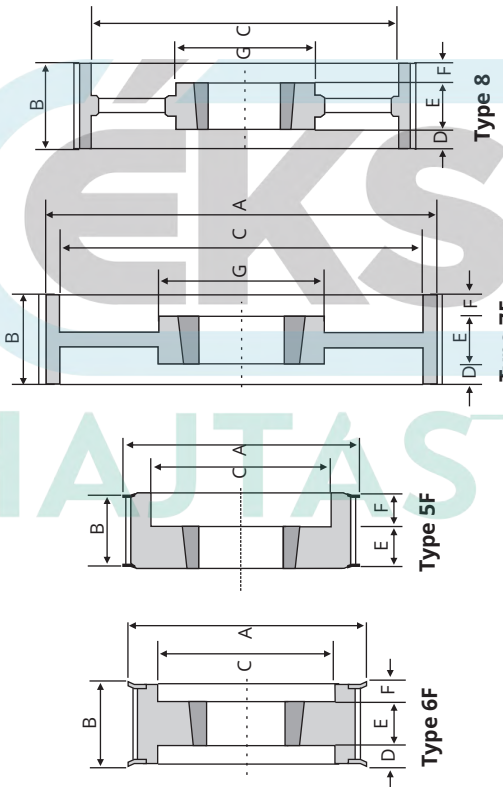

Pulley Description	Pitch Dia (P) (mm)	No. of Teeth	Outside Dia. (mm)	Bush No.	Max. Bore Met. (mm)	Imp. (inches)	Pulley Type	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)
STP-28-14M-55	124.78	28	122.12	2012	50.0	2	6F	141.0	70.0	90.0	19.0	32.0	19.0	-
STP-29-14M-55	129.23	29	126.57	2012	50.0	2	6F	141.0	70.0	91.0	19.0	32.0	19.0	-
STP-30-14M-55	133.69	30	130.99	2517	60.0	2 1/2	6F	141.0	70.0	95.0	12.5	45.0	12.5	-
STP-32-14M-55	142.60	32	139.88	2517	60.0	2 1/2	6F	156.0	70.0	100.0	12.5	45.0	12.5	-
STP-34-14M-55	151.51	34	148.79	2517	60.0	2 1/2	6F	156.0	70.0	109.0	12.5	45.0	12.5	-
STP-36-14M-55	160.43	36	157.68	2517	60.0	2 1/2	5F	169.0	70.0	117.0	0.0	45.0	25.0	-
STP-38-14M-55	169.34	38	166.60	2517	60.0	2 1/2	5F	183.0	70.0	126.0	0.0	45.0	25.0	-
STP-40-14M-55	178.25	40	175.49	2517	60.0	2 1/2	6F	197.0	70.0	135.0	12.5	45.0	12.5	-
STP-44-14M-55	196.08	44	193.28	3020	75.0	3	6F	211.0	70.0	153.0	9.5	51.0	9.5	-
STP-48-14M-55	213.90	48	211.11	3020	75.0	3	6F	226.0	70.0	171.0	9.5	51.0	9.5	-
STP-56-14M-55	249.55	56	246.76	3020	75.0	3	6F	267.0	70.0	207.0	9.5	51.0	9.5	-
STP-64-14M-55	285.21	64	282.41	3020	75.0	3	7F	297.0	70.0	242.0	9.5	51.0	9.5	159.0
STP-72-14M-55	320.86	72	316.06	3020	75.0	3	8	-	70.0	278.0	9.5	51.0	9.5	159.0
STP-80-14M-55	356.51	80	353.71	3020	75.0	3	8	-	70.0	314.0	9.5	51.0	9.5	159.0
STP-90-14M-55	401.07	90	398.28	3020	75.0	3	8	-	70.0	362.0	9.5	51.0	9.5	159.0
STP-112-14M-55	499.11	112	496.32	3020	75.0	3	8	-	70.0	456.0	9.5	51.0	9.5	159.0
STP-144-14M-55	641.71	144	638.92	3020	75.0	3	8	-	70.0	600.0	9.5	51.0	9.5	159.0
STP-168-14M-55	748.66	168	745.87	3020	75.0	3	8	-	70.0	706.0	9.5	51.0	9.5	159.0
STP-192-14M-55	855.62	192	852.82	3020	75.0	3	8	-	70.0	812.0	9.5	51.0	9.5	159.0

14mm pitch High Torque (HTD) Pulley (85mm wide Belts)

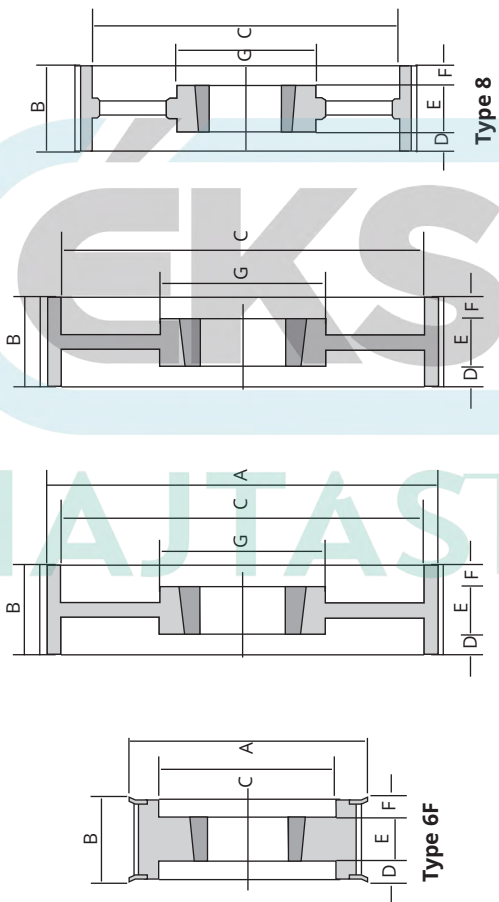

Pulley Description	Pitch Dia (P) (mm)	No. of Teeth	Outside Dia. (mm)	Bush No.	Max. Bore Met. (mm)	Max. Bore Imp. (inches)	Pulley Type	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)
STP-28-14M-85	124.78	28	122.12	2517	60.0	2 1/2	6F	141.0	102.0	98.0	27.5	45.0	27.5	-
STP-29-14M-85	129.23	29	126.57	2517	60.0	2 1/2	6F	141.0	102.0	98.0	27.5	45.0	27.5	-
STP-30-14M-85	133.69	30	130.99	2517	60.0	2 1/2	6F	141.0	102.0	100.0	27.5	45.0	27.5	-
STP-32-14M-85	142.60	32	139.88	2517	60.0	2 1/2	6F	156.0	102.0	100.0	27.5	45.0	27.5	-
STP-34-14M-85	151.51	34	148.79	2517	60.0	2 1/2	6F	156.0	102.0	109.0	27.5	45.0	27.5	-
STP-36-14M-85	160.43	36	157.68	3020	75.0	3	6F	169.0	102.0	123.0	27.5	51.0	27.5	-
STP-38-14M-85	169.34	38	166.60	3020	75.0	3	6F	183.0	102.0	126.0	27.5	51.0	27.5	-
STP-40-14M-85	178.25	40	175.49	3020	75.0	3	6F	197.0	102.0	135.0	27.5	51.0	27.5	-
STP-44-14M-85	196.08	44	193.28	3020	75.0	3	6F	211.0	102.0	153.0	27.5	51.0	27.5	-
STP-48-14M-85	213.90	48	211.11	3020	75.0	3	6F	226.0	102.0	171.0	27.5	51.0	27.5	-
STP-56-14M-85	249.55	56	246.76	3525	100.0	4	6F	267.0	102.0	207.0	18.5	65.0	18.5	-
STP-64-14M-85	285.21	64	282.41	3525	100.0	4	7F	297.0	102.0	242.0	18.5	65.0	18.5	-
STP-72-14M-85	320.86	72	316.06	3525	100.0	4	7	-	102.0	278.0	18.5	65.0	18.5	178.0
STP-80-14M-85	356.51	80	353.71	3525	100.0	4	7	-	102.0	314.0	18.5	65.0	18.5	178.0
STP-90-14M-85	401.07	90	398.28	3525	100.0	4	8	-	102.0	358.0	18.5	65.0	18.5	178.0
STP-112-14M-85	499.11	112	496.32	3525	100.0	4	8	-	102.0	456.0	18.5	65.0	18.5	178.0
STP-144-14M-85	641.71	144	638.92	3525	100.0	4	8	-	102.0	600.0	18.5	65.0	18.5	206.0
STP-168-14M-85	748.66	168	745.87	3525	100.0	4	8	-	102.0	706.0	18.5	65.0	18.5	206.0
STP-192-14M-85	855.62	192	852.82	4030	115.0	4 1/2	8	-	102.0	812.0	13.0	76.0	13.0	216.0