



8mm Pitch High Torque (HTD) Pulley (20mm wide Belts)

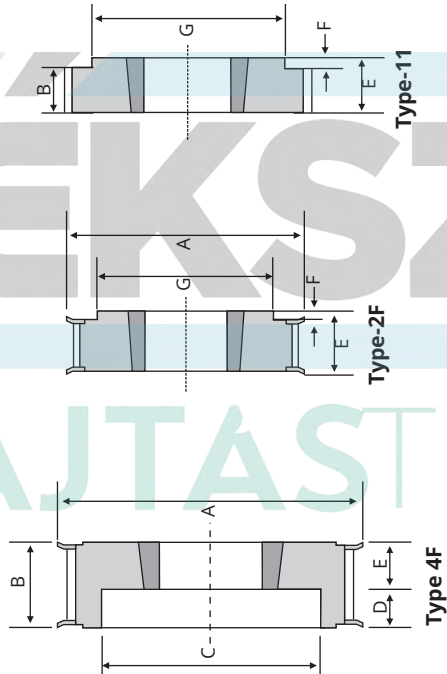


Pulley Description	Pitch Dia (P) (mm)	No. of Teeth	Outside Dia. (mm)	Bush No.	Max. Bore Met. (mm)	Imp. (inches)	Pulley Type	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)
STP-22-8M-20	56.02	22	54.65	1008	25.0	1	4F	62.0	26.0	41.0	4.0	22.0	-	-
STP-24-8M-20	61.12	24	59.75	1008	28.0	1 1/8	4F	70.0	26.0	44.0	4.0	22.0	-	-
STP-26-8M-20	66.21	26	64.84	1008	28.0	1 1/8	4F	75.0	26.0	44.0	4.0	22.0	-	-
STP-28-3M-20	71.30	28	70.08	1108	28.0	1 1/8	4F	79.0	26.0	50.0	4.0	22.0	-	-
STP-30-3M-20	76.39	30	75.13	1108	28.0	1 1/8	4F	86.0	26.0	55.0	4.0	22.0	-	-
STP-32-8M-20	81.49	32	80.16	1610	42.0	1 5/8	2F	90.0	26.0	-	-	26.0	-	-
STP-34-8M-20	86.58	34	85.22	1610	42.0	1 5/8	2F	95.0	26.0	-	-	26.0	-	-
STP-36-8M-20	91.67	36	90.30	1610	42.0	1 5/8	2F	98.0	26.0	-	-	26.0	-	-
STP-38-8M-20	96.77	38	95.39	1610	42.0	1 5/8	2F	106.0	26.0	-	-	26.0	-	-
STP-40-8M-20	101.86	40	100.49	1610	42.0	1 5/8	2F	111.0	26.0	-	-	26.0	-	-
STP-44-6M-20	112.05	44	110.67	2012	50.0	2	2F	119.0	26.0	-	-	32.0	6.0	92.0
STP-48-8M-20	122.23	48	120.86	2012	50.0	2	11	135.0	26.0	-	-	32.0	6.0	104.0
STP-56-8M-20	142.60	56	141.23	2012	50.0	2	11	151.0	26.0	-	-	32.0	6.0	111.0
STP-64-8M-20	162.97	64	161.60	2012	50.0	2	2F	169.0	26.0	-	-	32.0	6.0	111.0
STP-72-8M-20	183.35	72	181.97	2012	50.0	2	11	-	26.0	-	-	32.0	6.0	111.0
STP-80-8M-20	203.72	80	202.35	2012	50.0	2	11	-	26.0	-	-	32.0	6.0	111.0
STP-90-8M-20	229.18	90	227.81	2012	50.0	2	11	-	26.0	-	-	32.0	6.0	111.0

8mm pitch High Torque (HTD) Pulley (30mm wide Belts)

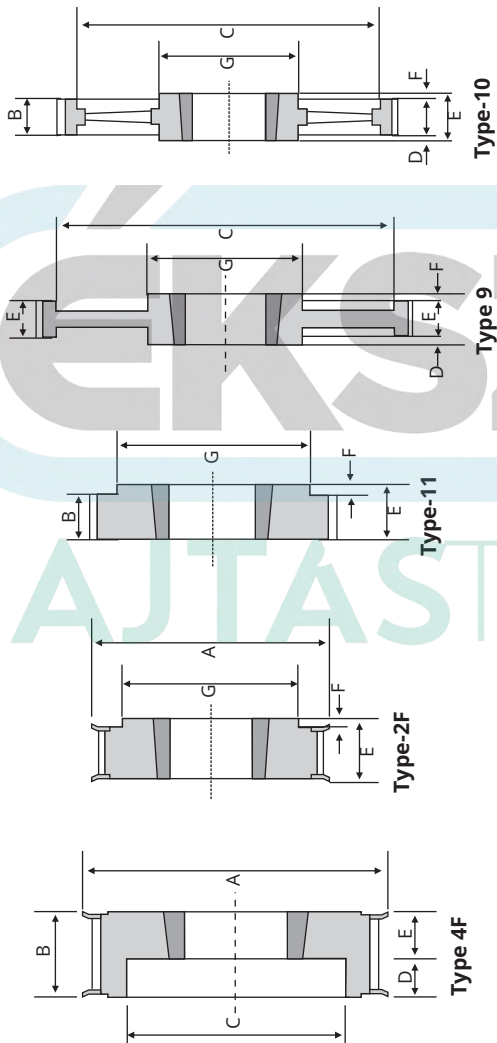


Pulley Description	Pitch Dia (P) (mm)	No. of Teeth	Outside Dia. (mm)	Bush No.	Max. Bore Met. (mm)	Imp. (inches)	Pulley Type	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)
STP-22-8M-30	56.02	22	54.65	1008	25.0	1	4F	62.0	36.0	41.0	14.0	22.0	-	-
STP-24-8M-30	61.12	24	59.75	1008	28.0	1 1/8	4F	70.0	36.0	44.0	14.0	22.0	-	-
STP-26-8M-30	66.21	26	64.84	1008	28.0	1 1/8	4F	75.0	36.0	44.0	14.0	22.0	-	-
STP-28-8M-30	71.30	28	70.08	1210	32.0	1 1/4	4F	79.0	36.0	55.0	11.0	25.0	-	-
STP-30-8M-30	76.39	30	75.13	1610	42.0	1 1/8	2F	86.0	36.0	-	-	38.0	2.0	66.0
STP-32-8M-30	81.49	32	80.16	1610	42.0	1 5/8	2F	90.0	36.0	-	-	38.0	2.0	66.0
STP-34-8M-30	86.58	34	85.22	1610	42.0	1 5/8	2F	95.0	36.0	-	-	38.0	2.0	70.0
STP-36-8M-30	91.67	36	90.30	1610	42.0	1 5/8	2F	98.0	36.0	-	-	38.0	2.0	70.0
STP-38-8M-30	96.77	38	95.39	1610	42.0	1 5/8	2F	106.0	36.0	-	-	38.0	2.0	75.0
STP-40-8M-30	101.86	40	100.49	1610	42.0	1 5/8	2F	111.0	36.0	-	-	38.0	2.0	75.0
STP-44-8M-30	112.05	44	110.67	2012	50.0	2	4F	119.0	36.0	80.0	4.0	32.0	-	-
STP-48-8M-30	122.23	48	120.86	2012	50.0	2	4F	135.0	36.0	90.0	4.0	32.0	-	-
STP-56-8M-30	142.60	56	141.23	2012	50.0	2	4F	151.0	36.0	110.0	4.0	32.0	-	-
STP-64-8M-30	162.97	64	161.60	2517	60.0	2 1/2	2F	168.0	36.0	-	-	45.0	9.0	124.0
STP-72-8M-30	183.35	72	181.97	2517	60.0	2 1/2	11	-	36.0	-	-	45.0	9.0	124.0
STP-80-8M-30	203.72	80	202.35	2517	60.0	2 1/2	11	-	36.0	-	-	45.0	9.0	124.0
STP-90-8M-30	229.18	90	227.81	2517	60.0	2 1/2	9	-	36.0	198.0	4.5	45.0	4.5	124.0
STP-112-8M-30	285.21	112	283.83	2517	60.0	2 1/2	9	-	36.0	254.0	4.5	45.0	4.5	124.0
STP-144-8M-30	366.59	144	365.32	2517	60.0	2 1/2	10	-	36.0	335.0	4.5	45.0	4.5	124.0

8mm pitch High Torque (HTD) Pulley (50mm wide Belts)

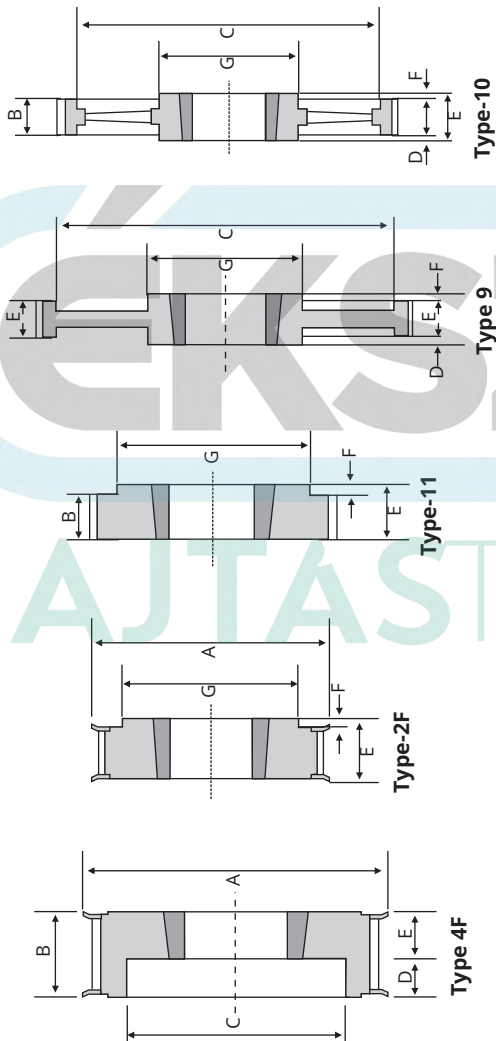

Pulley Description	Pitch Dia (P) (mm)	No. of Teeth	Outside Dia. (mm)	Bush No.	Max. Bore Met. (mm)	Pulley Type	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)
STP-28-8M-50	71.30	28	70.08	1210	32.0	1 1/4	79.0	57.0	55.0	32.0	25.0	-	-
STP-30-8M-50	76.39	30	75.13	1610	42.0	1 5/8	86.0	57.0	60.0	19.0	38.0	-	-
STP-32-8M-50	81.49	32	80.16	1610	42.0	1 5/8	90.0	57.0	60.0	19.0	38.0	-	-
STP-34-8M-50	86.58	34	85.22	1610	42.0	1 5/8	95.0	57.0	64.0	19.0	38.0	-	-
STP-36-6M-50	91.67	36	90.30	1610	42.0	1 5/8	98.0	57.0	65.0	19.0	38.0	-	-
STP-38-8M-50	96.77	38	95.39	1610	42.0	1 5/8	106.0	57.0	74.0	-	38.0	19.0	-
STP-40-8M-50	101.86	40	100.49	1610	50.0	2	111.0	57.0	75.0	25.0	32.0	-	-
STP-44-8M-50	112.05	44	110.67	2012	50.0	2	119.0	57.0	88.0	-	32.0	25.0	-
STP-48-8M-50	122.23	48	120.86	2012	50.0	2	135.0	57.0	90.0	-	32.0	25.0	-
STP-56-8M-50	142.60	56	141.23	2012	60.0	2 1/2	151.0	57.0	110.0	-	45.0	12.0	-
STP-64-8M-50	162.97	64	161.60	2517	60.0	2 1/2	168.0	57.0	130.0	-	45.0	12.0	-
STP-72-8M-50	183.35	72	181.97	2517	60.0	2 1/2	-	57.0	152.0	-	45.0	12.0	-
STP-80-8M-50	203.72	80	202.35	2517	75.0	3	-	57.0	172.0	-	51.0	6.0	-
STP-90-8M-50	229.18	90	227.81	3020	75.0	3	-	57.0	197.0	3.0	51.0	3.0	150.0
STP-112-8M-50	285.21	112	283.83	3020	75.0	3	-	57.0	253.0	3.0	51.0	3.0	150.0
STP-144-8M-50	366.59	144	365.32	3020	75.0	3	-	57.0	335.0	3.0	51.0	3.0	150.0
STP-168-8M-50	427.81	168	426.44	3525	100.0	4	-	57.0	396.0	4.0	65.0	4.0	198.0
STP-192-8M-50	488.92	192	487.55	3525	100.0	4	-	57.0	457.0	4.0	65.0	4.0	198.0

8mm pitch High Torque (HTD) Pulley (85mm wide Belts):

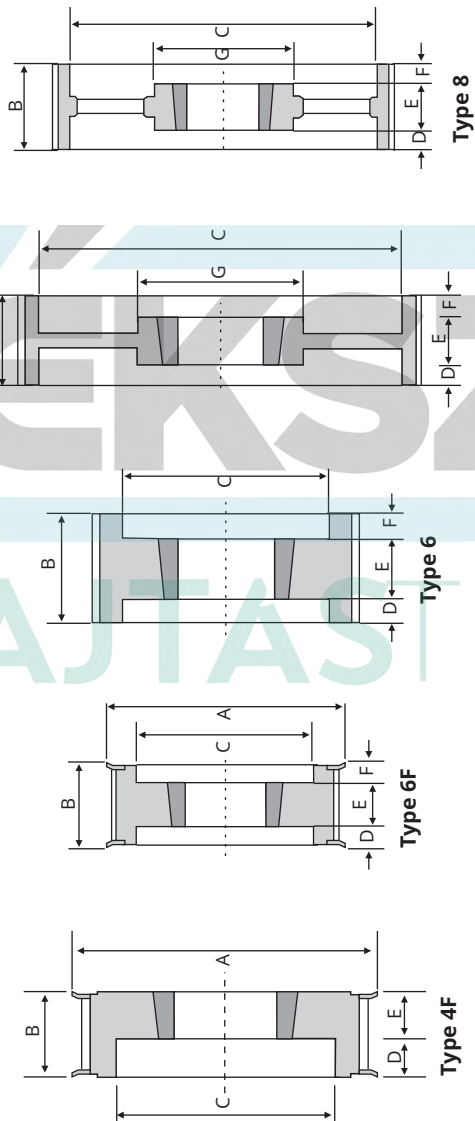

Pulley Description	Pitch Dia (P) (mm)	No. of Teeth	Outside Dia. (mm)	Bush No.	Max. Bore Met. (mm)	Max. Bore Imp. (inches)	Pulley Type	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)
STP-34-8M-85	86.58	34	85.22	1615	42.0	1 5/8	4F	95.0	94.0	64.0	56.0	32.0	-	-
STP-36-8M-85	91.67	36	90.30	1615	42.0	1 5/8	4F	98.0	94.0	65.0	56.0	38.0	-	-
STP-38-8M-85	96.77	38	95.39	1615	42.0	1 5/8	4F	106.0	94.0	65.0	56.0	38.0	-	-
STP-40-8M-85	101.86	40	100.49	2012	50.0	2	4F	111.0	94.0	78.0	62.0	32.0	-	-
STP-44-8M-55	112.05	44	110.67	2012	50.0	2	4F	119.0	94.0	85.0	62.0	32.0	-	-
STP-48-8M-85	122.23	48	120.86	2517	60.0	2 1/2	4F	135.0	94.0	96.0	49.0	45.0	-	-
STP-56-3M-85	142.60	56	141.23	2517	60.0	2 1/2	6F	151.0	94.0	111.0	24.5	45.0	24.5	-
STP-64-8M-85	162.97	64	161.60	2517	60.0	2 1/2	6F	168.0	94.0	131.0	24.5	45.0	24.5	-
STP-72-8M-85	183.35	72	181.97	3020	75.0	3	6	-	94.0	152.0	21.5	51.0	21.5	-
STP-80-8M-85	203.72	80	202.35	3020	75.0	3	6	-	94.0	172.0	21.5	51.0	21.5	-
STP-90-8M-85	229.18	90	227.81	3020	75.0	3	6	-	94.0	197.0	21.5	51.0	21.5	-
STP-112-8M-85	285.21	112	283.83	3020	75.0	3	7	-	94.0	253.0	21.5	51.0	21.5	150.0
STP-144-8M-65	366.59	144	365.32	3525	100.0	4	7	-	94.0	335.0	14.5	65.0	14.5	198.0
STP-168-8M-85	427.81	168	426.44	3525	100.0	4	8	-	94.0	396.0	14.5	65.0	14.5	198.0
STP-192-8M-85	488.92	192	487.55	3525	100.0	4	8	-	94.0	457.0	14.5	65.0	14.5	198.0