






L050- 1/2" (13mm) wide Belts

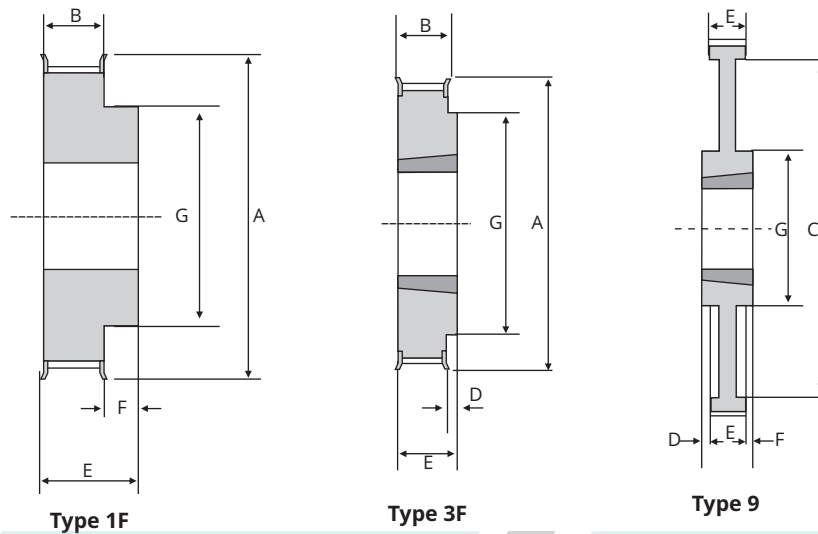

Pulley Description	Pitch Dia (P) (mm)	No. of Teeth	Bush No.	Max. Bore Met. (mm)	Max. Bore Imp. (inches)	Pulley Type	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)
STP-L-14-050	42.45	14	Pitch bore 10mm	19.0	-	1F	49.0	19.0	-	-	30.0	11.0	32.0
STP-L-15-050	45.48	15		22.0	-	1F	52.0	19.0	-	-	30.0	11.0	35.0
STP-L-16-050	48.51	16		25.0	-	1F	56.0	19.0	-	-	30.0	11.0	38.0
STP-L-17-050	51.54	17		25.0	-	1F	57.0	19.0	-	-	30.0	11.0	38.0
STP-L-18-050	54.57	18	1108	28.0	1 1/8	3F	67.0	19.0	-	3.0	22.0	-	46.0
STP-L-19-050	57.61	19	1108	28.0	1 1/8	3F	67.0	19.0	-	3.0	22.0	-	46.0
STP-L-20-050	60.64	20	1108	28.0	1 1/8	3F	67.0	19.0	-	3.0	22.0	-	46.0
STP-L-21-050	63.67	21	1108	28.0	1 1/8	3F	70.0	19.0	-	3.0	22.0	-	48.0
STP-L-22-050	66.70	22	1108	28.0	1 1/8	3F	75.0	19.0	-	3.0	22.0	-	51.0
STP-L-23-050	69.73	23	1108	28.0	1 1/8	3F	79.0	19.0	-	3.0	22.0	-	54.0
STP-L-24-050	72.77	24	1108	28.0	1 1/8	3F	79.0	19.0	-	3.0	22.0	-	54.0
STP-L-25-050	75.80	25	1108	28.0	1 1/8	3F	83.0	19.0	-	3.0	22.0	-	54.0
STP-L-26-050	78.83	26	1108	28.0	1 1/8	3F	86.0	19.0	-	3.0	22.0	-	60.0
STP-L-27-050	81.86	27	1108	28.0	1 1/8	3F	90.0	19.0	-	3.0	22.0	-	64.0
STP-L-28-050	84.89	28	1108	28.0	1 1/8	3F	90.0	19.0	-	3.0	22.0	-	64.0
STP-L-30-050	90.96	30	1108	28.0	1 1/8	3F	98.0	19.0	-	3.0	22.0	-	73.0
STP-L-32-050	97.02	32	1108	28.0	1 1/8	3F	103.0	19.0	-	3.0	25.0	-	76.0
STP-L-36-050	109.15	36	1108	28.0	1 1/8	3F	114.0	19.0	-	3.0	25.0	-	76.0
STP-L-40-050	121.25	40	1610	42.0	1 5/8	3F	127.0	19.0	-	3.0	25.0	-	89.0
STP-L-48-050	145.53	48	1610	42.0	1 5/8	3F	151.0	19.0	-	3.0	25.0	-	114.0
STP-L-60-050	181.91	60	1610	42.0	1 5/8	9	-	19.0	165.0	3.0	25.0	3.0	92.0
STP-L-72-050	218.30	72	1610	42.0	1 5/8	9	-	19.0	202.0	3.0	25.0	3.0	92.0
STP-L-84-050	254.68	84	1610	42.0	1 5/8	9	-	19.0	238.0	3.0	25.0	3.0	92.0
STP-L-96-050	291.06	96	2012	50.0	1 5/8	9	-	19.0	275.0	6.5	32.0	6.5	111.0
STP-L-120-050	363.83	120	2012	50.0	2	9	-	19.0	344.0	6.5	32.0	6.5	111.0

Met.: Metric, Imp.: Imperial, Dia.: Diameter, Max.: Maximum





L075- 3/4" (19mm) wide Belts

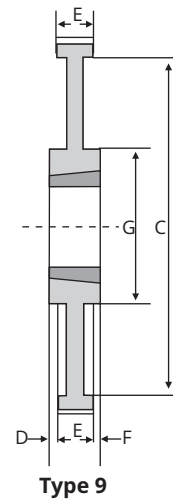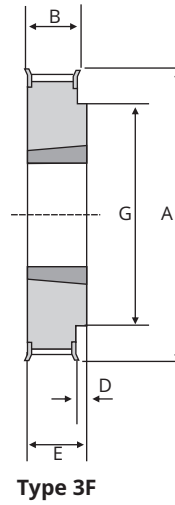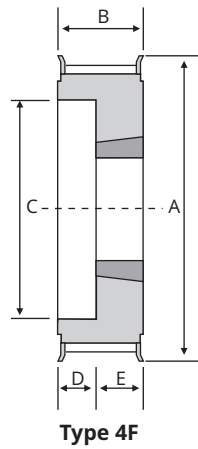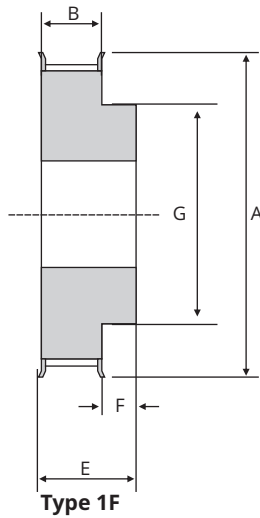

Pulley Description	Pitch Dia (P) (mm)	No. of Teeth	Bush No.	Max. Met. (mm)	Max. Imp. (inches)	Pulley Type	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)
STP-L-14-075	42.45	14	Pitch bore 10mm	19.0	-	1F	49.0	25.0	-	-	37.0	12.0	32.0
STP-L-15-075	45.48	15		22.0	-	1F	52.0	25.0	-	-	37.0	12.0	35.0
STP-L-16-075	48.51	16		25.0	-	1F	56.0	25.0	-	-	37.0	12.0	38.0
STP-L-17-075	51.54	17		25.0	-	1F	57.0	25.0	-	-	37.0	12.0	38.0
STP-L-18-075	54.57	18	1108	28.0	1 1/8	4F	67.0	25.0	-	3.00	22.0	-	-
STP-L-19-075	57.61	19	1108	28.0	1 1/8	4F	67.0	25.0	-	3.00	22.0	-	-
STP-L-20-075	60.64	20	1108	28.0	1 1/8	4F	67.0	25.0	-	3.00	22.0	-	-
STP-L-21-075	63.67	21	1108	28.0	1 1/8	4F	70.0	25.0	-	3.00	22.0	-	-
STP-L-22-075	66.70	22	1108	28.0	1 1/8	4F	75.0	25.0	-	3.00	22.0	-	-
STP-L-23-075	69.73	23	1108	28.0	1 1/8	4F	79.0	25.0	-	3.00	22.0	-	-
STP-L-24-075	72.77	24	1108	28.0	1 1/8	4F	79.0	25.0	-	3.00	22.0	-	-
STP-L-25-075	75.80	25	1108	28.0	1 1/8	4F	83.0	25.0	-	3.00	22.0	-	-
STP-L-26-075	78.83	26	1108	28.0	1 1/8	4F	86.0	25.0	-	3.00	22.0	-	-
STP-L-27-075	81.86	27	1108	28.0	1 1/8	4F	90.0	25.0	-	3.00	22.0	-	-
STP-L-28-075	84.89	28	1108	28.0	1 1/8	4F	90.0	25.0	-	3.00	22.0	-	-
STP-L-30-075	90.96	30	1108	28.0	1 1/8	4F	98.0	25.0	-	3.00	22.0	-	-
STP-L-32-075	97.02	32	1108	28.0	1 1/8	4F	103.0	25.0	-	3.00	22.0	-	-
STP-L-36-075	109.15	36	1108	28.0	1 5/8	3F	114.0	25.0	-	0.00	25.0	-	-
STP-L-40-075	121.25	40	1610	42.0	1 5/8	3F	127.0	25.0	-	0.00	25.0	-	-
STP-L-48-075	145.53	48	1610	42.0	1 5/8	3F	151.0	25.0	-	0.00	25.0	-	-
STP-L-60-075	181.91	60	1610	42.0	1 5/8	9	-	25.0	165.0	0.00	25.0	0.0	92.0
STP-L-72-075	218.30	72	1610	42.0	1 5/8	9	-	25.0	202.0	0.00	25.0	0.0	92.0
STP-L-84-075	254.68	84	1610	42.0	1 5/8	9	-	25.0	238.0	3.50	32.0	3.5	92.0
STP-L-96-075	291.06	96	2012	50.0	1 5/8	9	-	25.0	275.0	3.50	32.0	3.5	111.0
STP-L-120-075	363.83	120	2012	50.0	2	9	-	25.0	344.0	3.50	32.0	3.5	111.0

Met.: Metric, Imp.: Imperial, Dia.: Diameter, Max.: Maximum

L100-1" (25mm) wide Belts

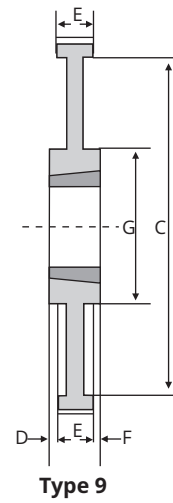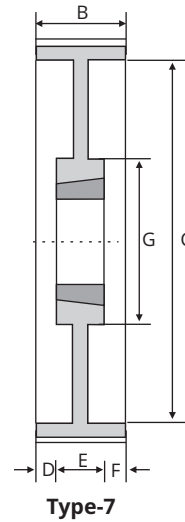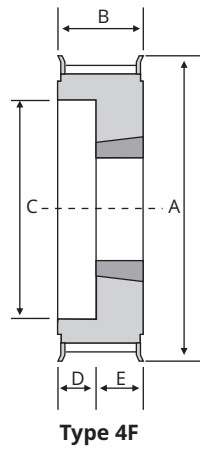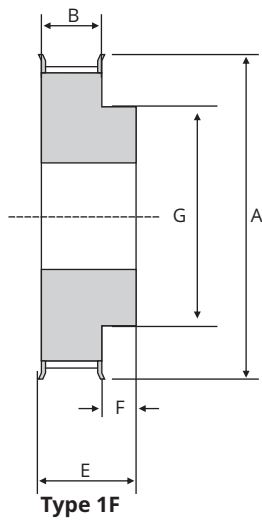

Pulley Description	Pitch Dia (P) (mm)	No. of Teeth	Bush No.	Max. Met. (mm)	Max. Imp. (inches)	Pulley Type	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)
STP-L-14-100	42.45	14	Pitch bore 10mm	19.0	-	1F	49.0	32.0	-	-	37.0	11.0	32.0
STP-L-15-100	45.48	15		22.0	-	1F	52.0	32.0	-	-	37.0	11.0	35.0
STP-L-16-100	48.51	16		25.0	-	1F	56.0	32.0	-	-	37.0	11.0	38.0
STP-L-17-100	51.54	17		25.0	-	1F	57.0	32.0	-	-	37.0	11.0	38.0
STP-L-18-100	54.57	18	1108	28.0	1 1/8	4F	67.0	32.0	38.0	10.0	22.0	-	-
STP-L-19-100	57.61	19	1108	28.0	1 1/8	4F	67.0	32.0	38.0	10.0	22.0	-	-
STP-L-20-100	60.64	20	1108	28.0	1 1/8	4F	67.0	32.0	38.0	10.0	22.0	-	-
STP-L-21-100	63.67	21	1108	28.0	1 1/8	4F	70.0	32.0	38.0	10.0	22.0	-	-
STP-L-22-100	66.70	22	1108	28.0	1 1/8	4F	75.0	32.0	48.0	10.0	22.0	-	-
STP-L-23-100	69.73	23	1108	28.0	1 1/8	4F	79.0	32.0	48.0	10.0	22.0	-	-
STP-L-24-100	72.77	24	1108	28.0	1 1/8	4F	79.0	32.0	48.0	10.0	22.0	-	-
STP-L-25-100	75.80	25	1108	28.0	1 1/8	4F	83.0	32.0	45.0	10.0	22.0	-	-
STP-L-26-100	78.83	26	1108	28.0	1 1/8	4F	86.0	32.0	45.0	10.0	22.0	-	-
STP-L-27-100	81.86	27	1108	28.0	1 1/8	4F	90.0	32.0	45.0	10.0	22.0	-	-
STP-L-28-100	84.89	28	1108	28.0	1 1/8	4F	90.0	32.0	45.0	10.0	22.0	-	-
STP-L-30-100	90.96	30	1108	28.0	1 1/8	4F	98.0	32.0	52.0	7.0	22.0	-	-
STP-L-32-100	97.02	32	1108	28.0	1 1/8	4F	103.0	32.0	52.0	7.0	22.0	-	-
STP-L-36-100	109.15	36	1108	28.0	1 5/8	4F	114.0	32.0	76.0	7.0	25.0	-	-
STP-L-40-100	121.25	40	1610	42.0	1 5/8	4F	127.0	32.0	89.0	7.0	25.0	-	-
STP-L-48-100	145.53	48	1610	42.0	1 5/8	4F	151.0	32.0	108.0	7.0	25.0	-	-
STP-L-60-100	181.91	60	1610	42.0	1 5/8	7	-	32.0	165.0	3.5	25.0	3.5	92.0
STP-L-72-100	218.30	72	1610	42.0	2	9	-	32.0	202.0	0.0	25.0	0.0	92.0
STP-L-84-100	254.68	84	1610	42.0	2	9	-	32.0	238.0	0.0	32.0	0.0	92.0
STP-L-96-100	291.06	96	2012	50.0	2	9	-	32.0	275.0	0.0	32.0	0.0	111.0
STP-L-120-100	363.83	120	2012	50.0	2	9	-	32.0	344.0	0.0	32.0	0.0	111.0

Met.: Metric, Imp.: Imperial, Dia.: Diameter, Max.: Maximum